

Huawei S5720-SI Series Switches Product Brochure



HUAWEI TECHNOLOGIES CO., LTD.



mail@mytel.pro

8 (812) 927-57-27

MYTEL.PRO/HUAWEI

S5720-SI Series Switches

Product Overview

The S5720-SI series switches (S5720-SI for short) are next-generation standard gigabit Layer 3 Ethernet switches that provide flexible full gigabit access and cost-effective fixed GE ports and 10GE uplink ports. The S5720-SI was developed based on next-generation high-performing hardware and the Huawei Versatile Routing Platform (VRP). The S5720-SI supports simplified operations and maintenance (O&M), intelligent stack (iStack), flexible Ethernet networking, and MACsec. It also provides enhanced Layer 3 features and mature IPv6 features. The S5720-SI can be used in various scenarios. For example, it can be used as an access or aggregation switch on a campus network or as an access switch in a data center.

Models and Appearances

The following models are available in the S5720-SI series.

S5720-28P-SI-AC



- 24 Ethernet 10/100/1000 ports, 4 of which are dual-purpose 10/100/1000 or SFP, 4 Gig SFP
- Dual pluggable AC or DC power supplies, one AC power supply equipped by default
- Forwarding performance: 42 Mpps
- Switching capacity: 336 Gbit/s

S5720-28X-SI-AC S5720-28X-SI-DC



- 24 Ethernet 10/100/1000 ports, 4 of which are dual-purpose 10/100/1000 or SFP, 4 10 Gig SFP+
- Dual pluggable AC or DC power supplies, one AC or DC power supply equipped by default
- Forwarding performance: 96 Mpps
- Switching capacity: 336 Gbit/s

S5720-28X-PWR-SI-AC S5720-28X-PWR-SI-DC



- 24 Ethernet 10/100/1000 PoE+ ports, 4 of which are dual-purpose 10/100/1000 or SFP, 4 10 Gig SFP+
- Dual pluggable AC or DC power supplies, one 500 W AC power supply or one 650 W DC power supply equipped by default
- PoE+
- Forwarding performance: 96 Mpps
- Switching capacity: 336 Gbit/s

S5720-28X-SI-24S-AC



S5720-28X-SI-24S-AC



- 24 Gig SFP, 8 of which are dual-purpose 10/100/1000 or SFP, 4 10 Gig SFP+
- AC or DC power supply
- Forwarding performance: 96 Mpps
- Switching capacity: 336 Gbit/s

S5721-28X-SI-24S-AC



- 24 Gig SFP, 8 of which are dual-purpose 10/100/1000 or SFP, 4 10 Gig SFP+
- Dual pluggable AC or DC power supplies, one 60 W AC power supply equipped by default
- Forwarding performance: 96 Mpps
- Switching capacity: 336 Gbit/s

S5720-52P-SI-AC



- 48 Ethernet 10/100/1000 ports, 4 Gig SFP
- Dual pluggable AC or DC power supplies, one AC power supply equipped by default
- Forwarding performance: 78 Mpps
- Switching capacity: 336 Gbit/s

S5720-52X-SI-AC S5720-52X-SI-DC



- 48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- Dual pluggable AC or DC power supplies, one AC or DC power supply equipped by default
- Forwarding performance: 132 Mpps
- Switching capacity: 336 Gbit/s

S5720-52X-PWR-SI-AC S5720-52X-PWR-SI-DC



- 48 Ethernet 10/100/1000 PoE+ ports, 4 10 Gig SFP+
- Dual pluggable AC or DC power supplies, one 500 W AC power supply or one 650 W DC power supply equipped by default
- PoE+
- Forwarding performance: 132 Mpps
- Switching capacity: 336 Gbit/s

S5720-52X-PWR-SI-ACF



- 48 Ethernet 10/100/1000 PoE+ ports, 4 10 Gig SFP+
- Dual pluggable AC power supplies, one 1150 W AC power supply equipped by default
- PoE+
- Forwarding performance: 132 Mpps
- Switching capacity: 336 Gbit/s

S5720S-28P-SI-AC



- 24 Ethernet 10/100/1000 ports, 4 Gig SFP
- AC power supply, supporting RPS
- Forwarding performance: 42 Mpps
- Switching capacity: 336 Gbit/s

S5720S-28X-SI-AC S5720S-28X-SI-DC



- 24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- AC/DC power supply, supporting RPS
- Forwarding performance: 96 Mpps
- Switching capacity: 336 Gbit/s

S5720S-52P-SI-AC



- 48 Ethernet 10/100/1000 ports, 4 Gig SFP
- AC power supply, supporting RPS
- Forwarding performance: 78 Mpps
- Switching capacity: 336 Gbit/s

S5720S-52X-SI-AC S5720S-52X-SI-DC



- 48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+
- AC/DC power supply, supporting RPS
- Forwarding performance: 132 Mpps
- Switching capacity: 336 Gbit/s

Product Features and Highlights

Powerful service processing capability and multiple security control mechanisms

- The S5720-SI supports many Layer 2/Layer 3 multicast protocols such as PIM SM, PIM DM, PIM SSM, MLD, and IGMP snooping, to support multi-terminal high-definition video surveillance and video conferencing services.
- The S5720-SI supports multiple Layer 3 features including OSPF, IS-IS, BGP, and VRRP, meeting enterprises' requirements on access and aggregation service bearing, and enabling a variety of voice, video, and data applications.
- The S5720-SI supports MAC address authentication, 802.1x authentication, and Portal authentication, and implements dynamic delivery of policies (VLAN, QoS, and ACL) to users.
- The S5720-SI provides a series of mechanisms to defend against DoS and user-targeted attacks. DoS attacks are targeted at switches and include SYN flood, Land, Smurf, and ICMP flood attacks. User-targeted attacks include bogus DHCP server attacks, IP/MAC address spoofing, DHCP request flood, and change of the DHCP CHADDR value.
- The S5720-SI sets up and maintains a DHCP snooping binding table, and discards the packets that do not match the table entries. You can specify DHCP snooping trusted and untrusted ports to ensure that users connect only to the authorized DHCP server.
- The S5720-SI supports strict ARP learning, which protects a network against ARP spoofing attacks to ensure normal network access.

Easy O&M

- The S5720-SI supports Super Virtual Fabric (SVF), which virtualizes the "Core/aggregation + Access switch + AP" structure into a logical device. The S5720-SI provides the simplest network management solution in the industry to simplify device management. It allows plug-and-play access switches and APs. In addition, the S5720-SI supports service configuration templates. The templates are configured on core devices and automatically delivered to access devices, enabling centralized control, simplified service configuration, and flexible configuration modification. The S5720-SI functions as a client in an SVF system.

- The S5720-SI supports zero-touch deployment, replacement of faulty devices without additional configuration, USB-based deployment, batch configuration, and batch remote upgrade. The capabilities facilitate device deployment, upgrade, service provisioning, and other management and maintenance operations, and also greatly reduce O&M costs. The S5720-SI can be managed using SNMP v1/v2c/v3, CLI, web-based network management system, or SSH v2.0. Additionally, it supports RMON, multiple log hosts, port traffic statistics collection, and network quality analysis, which facilitate network optimization and reconstruction.
- The S5720-SI supports the Sampled Flow (sFlow) function. It uses a method defined in the sFlow standard to sample traffic passing through it and sends sampled traffic to the collector in real time. The collected traffic statistics are used to generate statistical reports, helping enterprises maintain their networks.

Multiple reliability mechanisms

- The S5720-SI supports iStack. This technology can virtualize up to nine physical switches into one logical switch. Downlink electrical ports support iStack. Member switches in a stack implement redundancy backup to improve device reliability and use inter-device link aggregation to improve link reliability. iStack provides high network scalability. You can increase a stack's ports, bandwidth, and processing capacity by simply adding member switches. iStack also simplifies device configuration and management. After a stack is set up, multiple physical switches are virtualized into one logical device. You can log in to any member switch in the stack to manage all the member switches in the stack.
- The S5720-SI is equipped with two removable power modules that can work in 1+1 redundancy backup mode. Mixed installation of AC and DC power modules is supported, allowing for flexible configuration of AC or DC power modules according to service requirements.
- In addition to traditional STP, RSTP, and MSTP, the S5720-SI supports Huawei-developed Smart Ethernet Protection (SEP) technology and the latest Ethernet Ring Protection Switching (ERPS) standard. SEP is a ring protection protocol specific to the Ethernet link layer, and applies to various ring network topologies, such as open ring topology, closed ring topology, and cascading ring topology. This protocol is reliable, easy to maintain, and implements fast protection switching within 50 ms. ERPS is defined in ITU-T G.8032. It implements millisecond-level protection switching based on traditional Ethernet MAC and bridging functions.
- The S5720-SI supports Smart Link. One S5720-SI switch can connect to multiple aggregation switches through multiple links, implementing backup of uplinks and significantly improving reliability of access devices.
- The S5720-SI supports Ethernet OAM (IEEE 802.3ah/802.1ag) to detect link faults quickly.

Mature IPv6 technologies

- The S5720-SI uses the mature, stable VRP platform and supports IPv4/IPv6 dual stack, IPv6 RIPng, and IPv6 over IPv4 tunnels (including manual, 6-to-4, and ISATAP tunnels). With these IPv6 features, the S5720-SI can be deployed on a pure IPv4 network, a pure IPv6 network, or a shared IPv4/IPv6 network, helping achieve IPv4-to-IPv6 transition.

Cloud management

- The Huawei cloud management platform allows users to configure, monitor, and inspect switches on the cloud, reducing on-site deployment and O&M manpower costs and decreasing network OPEX. Huawei switches support both cloud management and on-premise management modes. These two management modes can be flexibly switched as required to achieve smooth evolution while maximizing return on investment (ROI).

OPS(Open Programmability System)

- Open Programmability System (OPS) is an open programmable system based on the Python language. IT administrators can program the O&M functions of a switch through Python scripts to quickly innovate functions and implement intelligent O&M.

Product Specifications

Item	S5720-28P-SI-AC	S5720-28X-SI-AC(DC)	S5720-28X-PWR-SI-AC(DC)	S5720-28X-SI-24S-AC(DC)
Fixed ports	24 × 10 /100 /1000Base-T, 4 × Combo (10 /100 /1000 BASE-T or 100 /1000BASE-X), 4 × Gig SFP	24 × 10 /100 /1000Base-T, 4 × Combo (10 /100 /1000 BASE-T or 100 /1000 BASE-X), 4 × 10 Gig SFP+	24 × 10 /100 /1000Base-T, 4 × Combo (10 /100 /1000 BASE-T or 100 /1000 BASE-X), 4 × 10 Gig SFP+	24 × Gig SFP, 8 × Combo (10/100/1000BASE-T or 100/1000BASE-X), 4 × 10 Gig SFP+
MAC address table	16K	16K	16K	16K
Dimensions mm (W × D × H)	442 × 420 × 44.4	442 × 420 × 44.4	442 × 420 × 44.4	442* 220* 43.6
Slot	NA	NA	NA	NA
Input voltage	AC: Rated AC voltage: 100-240V AC;50/60Hz Max AC voltage: 90-264V AC;47-63Hz; DC: Rated DC power: -48- -60V DC Max DC voltage: -36- -72V DC			
Maximum power consumption	34.6W		S5720-28X-SI-AC/ DC: 37.5W/36.9W S5720-28X-PWR-SI-AC /DC: without PD :56.1W /56.3w; with PD: 913W/ 887W (PoE:740W)	41.7W/42.7W
Typical power consumption	21.2W	S5720-28X-SI-AC(DC): 22.3W(22.5W)	S5720-28X-PWR-SI-AC(DC): 31.8W(32.6W)	28.9 W/30.3W
Operating temperature	0 m-1800 m altitude:0-45°C(long term);-5°C to 50°C (short term) 1800-5000 m altitude: The operating temperature reduces by 1° C every time the altitude increases by 220 m.			
Relative humidity	5% to 95% (non-condensing)			
Heat dissipation	Heat dissipation using fans supporting intelligent speed adjustment			
Surge Protection	Surge protection capability of service ports: ± 6 kV			

Item	S5721-28X-SI-24S-AC	S5720-52P-SI-AC	S5720-52X-SI-AC(DC) S5720-52X-PWR-SI-AC(DC)	S5720-52X-PWR-SI-ACF
Fixed ports	16 × 100 /1000Base-X , 8 × Combo (10 /100 /1000 BASE-T or 100 /1000BASE-X), 4 × 10 Gig SFP+	48 × 10 /100 /1000 Base-T,4 × Gig SFP	48 × 10 /100 /1000 Base-T, 4 × 10 Gig SFP+	48 × 10 /100 /1000 Base-T, 4 × 10 Gig SFP+
MAC address table	16K	16K	16K	16K
Dimensions mm (W × D × H)	442* 420 *44.4	442* 420* 44.4	442 × 420 × 44.4	442* 507* 44.4
Slot	NA	NA	NA	NA
Input voltage	AC: Rated AC voltage: 100-240V AC;50/60Hz Max AC voltage: 90-264V AC;47-63Hz; DC: Rated DC power: -48- -60V DC Max DC voltage: -36- -72V DC			
Maximum power consumption	without PD:52W with PD:422W (PoE:370W)	34.6W	S5720-28X-SI-AC/ DC: 37.5W/36.9W S5720-28X-PWR-SI-AC /DC: without PD :56.1W /56.3w; with PD: 913W/ 887W (PoE:740W)	without PD :94.8W; with PD: 1631.5W (PoE:1440W)
Typical power consumption	34.5W	32.2W	S5720-52X-SI-AC/ DC: 33.8W/34W S5720-52X-PWR-SI-AC/DC: 51W	57W
Operating temperature	0 m-1800 m altitude:0-45°C(long term);-5°C to 50°C (short term) 1800-5000 m altitude: The operating temperature reduces by 1° C every time the altitude increases by 220 m.			
Relative humidity	5% to 95% (non-condensing)			
Heat dissipation	Heat dissipation using fans supporting intelligent speed adjustment			
Surge Protection	Surge protection capability of service ports: ± 6 kV			

Item	S5720S-28P-SI-AC	S5720S-28X-SI-AC(DC)	S5720S-52P-SI-AC	S5720S-52X-SI-AC(DC)
Fixed ports	24 × 10 /100/1000 Base-T, 4 × Gig SFP	24 × 10 /100 /1000Base-T, 4 × 10 Gig SFP+	48 × 10 /100 /1000 Base-T,4 × Gig SFP	48 × 10 /100 /1000 Base-T,4 × 10 Gig SFP+
MAC address table	16K	16K	16K	16K
Dimensions mm (W × D × H)	442 × 220 × 43.6	442 × 220 × 43.6	442 × 220 × 43.6	442 × 220 × 43.6
Slot	NA	NA	NA	NA
Input voltage	AC: Rated AC voltage: 100-240V AC;50/60Hz Max AC voltage: 90-264V AC;47-63Hz;			
	DC: Rated DC power: -48- -60V DC Max DC voltage: -36- -72V DC			
Maximum power consumption	29.1W	32W/33W	51.5W	54.7W/59.7W
Typical power consumption	20.2W	22W/21.9W	33W	34.4W/35.5W
Operating temperature	0 m-1800 m altitude:0-45°C(long term);-5°C to 50°C (short term) 1800-5000 m altitude: The operating temperature reduces by 1° C every time the altitude increases by 220 m.			
Relative humidity	5% to 95% (non-condensing)			
Heat dissipation	Heat dissipation using fans supporting intelligent speed adjustment			
Surge Protection	Surge protection capability of service ports: ± 6 kV			

Service Features

Item	Description
MAC address table	IEEE 802.1d compliance 16K MAC address entries MAC address learning and aging Static, dynamic, and blackhole MAC address entries Packet filtering based on source MAC addresses
VLAN	4K VLANs Guest VLAN and voice VLAN GVRP MUX VLAN VLAN assignment based on MAC addresses, protocols, IP subnets, policies, and ports 1:1 and N:1 VLAN mapping


Item	Description
Reliability	RRPP ring topology and RRPP multi-instance Smart Link tree topology and Smart Link multi-instance, providing millisecond-level protection switchover SEP STP (IEEE 802.1d), RSTP (IEEE 802.1w), and MSTP (IEEE 802.1s) ERPS (G.8032) BPDU protection, root protection, and loop protection
IP routing	Static route, RIPv1/v2, RIPng, OSPF, OSPFv3, ECMP, IS-IS, IS-ISv6, BGP, BGP4+, VRRP, and VRRP6
Multicast	PIM DM, PIM SM and PIM SSM IGMP v1/v2/v3, IGMP v1/v2/v3 snooping and IGMP fast leave MLD v1/v2 and MLD v1/v2 snooping Multicast forwarding in a VLAN and multicast replication between VLANs Multicast load balancing among member ports of a trunk Controllable multicast Port-based multicast traffic statistics
IPv6 features	IPv6 features Neighbor Discovery (ND) Path MTU (PMTU) IPv6 ping, IPv6 tracet, and IPv6 Telnet 6to4 tunnel, ISATAP tunnel, and manually configured tunnel
QoS/ACL	Rate limiting on packets sent and received by a port Packet redirection Port-based traffic policing and two-rate three-color CAR Eight queues on each port WRR, DRR, SP, WRR+SP, and DRR+SP queue scheduling algorithms Re-marking of the 802.1p priority and DSCP priority Packet filtering at Layer 2 to Layer 4, filtering out invalid frames based on the source MAC address, destination MAC address, source IP address, destination IP address, TCP/UDP port number, protocol type, and VLAN ID Rate limiting in each queue and traffic shaping on ports
Security	Hierarchical user management and password protection DoS attack defense, ARP attack defense, and ICMP attack defense Binding of the IP address, MAC address, port number, and VLAN ID Port isolation, port security, and sticky MAC MFF Blackhole MAC address entries Limit on the number of learned MAC addresses IEEE 802.1x authentication and limit on the number of users on a port AAA authentication, RADIUS authentication, HWTACACS authentication, and NAC SSH v2.0 HTTPS CPU defense Blacklist and whitelist IEEE 802.1x authentication, MAC address authentication, and Portal authentication DHCPv4/v6 client/relay/server/snooping Attack source tracing and punishment for IPv6 packets such as ND, DHCPv6, and MLD packets Supports separation between user authentication and policy enforcement points IPSec

Item	Description
SVF	Plug-and-play SVF client Automatic software and patch loading to clients One-click and automatic delivery of service configurations Independent client running
OAM	Software OAM: EFM OAM CFM OAM Y.1731 performance test
Management and maintenance	iStack (using service ports as stack ports) Virtual cable test SNMP v1/v2c/v3 RMON Web-based NMS System logs and alarms of different levels sFlow
Interoperability	Supports VBST (Compatible with PVST/PVST+/RPVST)
	Supports LNP (Similar to DTP)
	Supports VCMP (Similar to VTP)

Applications

On Large-sized Enterprise Networks

The S5720-SI can function as an access device on a large-sized or medium-sized enterprise network or an aggregation device on a small-sized campus network. It supports link aggregation and dual-homing to improve network reliability.

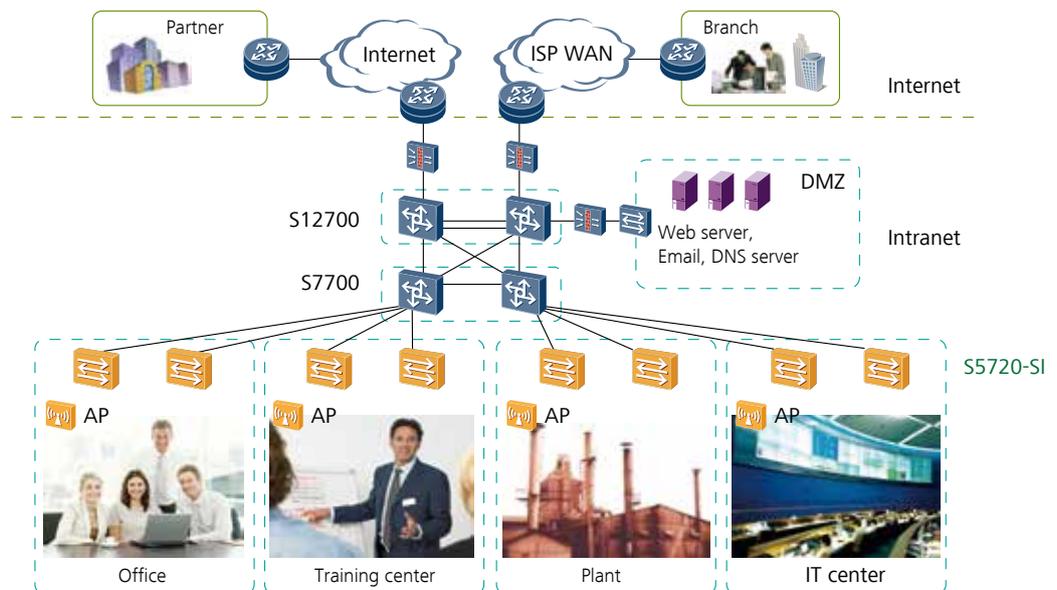

Ordering Information

Models	Product Description
S5720-28P-SI-AC	S5720-28P-SI bundle (24 Ethernet 10/100/1000 ports,4 of which are dual-purpose 10/100/1000 or SFP,4 Gig SFP,with 150W AC power supply)
S5720-28X-SI-AC	S5720-28X-SI bundle (24 Ethernet 10/100/1000 ports,4 of which are dual-purpose 10/100/1000 or SFP,4 10 Gig SFP+,with 150W AC power supply)
S5720-28X-SI-DC	S5720-28X-SI bundle (24 Ethernet 10/100/1000 ports, 4 of which are dual-purpose 10/100/1000 or SFP, 4 10 Gig SFP+, with 150W DC power supply)
S5720-28X-SI-24S-AC	S5720-28X-SI-24S bundle (24 Gig SFP, 8 of which are dual-purpose 10/100/1000 or SFP, 4 10 Gig SFP+,with 150W AC power supply)
S5720-28X-SI-24S-DC	S5720-28X-SI-24S bundle (24 Gig SFP, 8 of which are dual-purpose 10/100/1000 or SFP, 4 10 Gig SFP+, with 150W DC power supply)
S5720-28X-PWR-SI-AC	S5720-28X-PWR-SI bundle (24 Ethernet 10/100/1000 PoE+ ports,4 of which are dual-purpose 10/100/1000 or SFP,4 10 Gig SFP+,with 500W AC power)
S5720-28X-PWR-SI-DC	S5720-28X-PWR-SI bundle (24 Ethernet 10/100/1000 PoE+ ports, 4 of which are dual-purpose 10/100/1000 or SFP,4 10 Gig SFP+, with 650W DC power)
S5721-28X-SI-24S-AC	S5721-28X-SI-24S bundle (24 Gig SFP,8 of which are dual-purpose 10/100/1000 or SFP,4 10 Gig SFP+,with 60W AC power)
S5720-52P-SI-AC	S5720-52P-SI bundle (48 Ethernet 10/100/1000 ports,4 Gig SFP,with 150W AC power supply)
S5720-52X-SI-AC	S5720-52X-SI bundle (48 Ethernet 10/100/1000 ports,4 10 Gig SFP+,with 150W AC power supply)
S5720-52X-SI-DC	S5720-52X-SI bundle (48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, with 150W DC power supply)
S5720-52X-PWR-SI-AC	S5720-52X-PWR-SI bundle (48 Ethernet 10/100/1000 PoE+ ports,4 10 Gig SFP+,with 500W AC power)
S5720-52X-PWR-SI-DC	S5720-52X-PWR-SI bundle (48 Ethernet 10/100/1000 PoE+ ports, 4 10 Gig SFP+,with 650W DC power)
S5720-52X-PWR-SI-ACF	S5720-52X-PWR-SI bundle (48 Ethernet 10/100/1000 PoE+ ports,4 10 Gig SFP+,with 1150W AC power supply)
S5720S-28P-SI-AC	S5720S-28P-SI-AC(24 Ethernet 10/100/1000 ports,4 Gig SFP,AC 110/220V)
S5720S-28X-SI-AC	S5720S-28X-SI-AC(24 Ethernet 10/100/1000 ports,4 10 Gig SFP+,AC 110/220V)
S5720S-28X-SI-DC	S5720S-28X-SI-AC (24 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, DC)
S5720S-52P-SI-AC	S5720S-52P-SI-AC(48 Ethernet 10/100/1000 ports,4 Gig SFP,AC 110/220V)
S5720S-52X-SI-AC	S5720S-52X-SI-AC(48 Ethernet 10/100/1000 ports,4 10 Gig SFP+,AC 110/220V)
S5720S-52X-SI-DC	S5720S-52X-SI-DC(S5720S-52X-SI-AC (48 Ethernet 10/100/1000 ports, 4 10 Gig SFP+, DC)

Models	Product Description
PAC-60WA-L	60W AC Power Module
ES0W2PSA0150	150W AC Power Module(Black)
ES0W2PSD0150	150W DC Power Module(Black)
PAC-500WA-BE	500W AC PoE Power Module(Black, Power panel side exhaust)
PDC-650WA-BE	650W DC PoE Power Module(Black, Power panel side exhaust)
W2PSA1150	1150W AC Power Module
RPS1800	RPS1800 Redundant Power Supply (6 DC Output Ports, 12V Total Output Power 140W, 48V Total Output Power 1600W)

mail@mytel.pro

8 (812) 927-57-27

MYTEL.PRO/HUAWEI

