


MPC1E Q

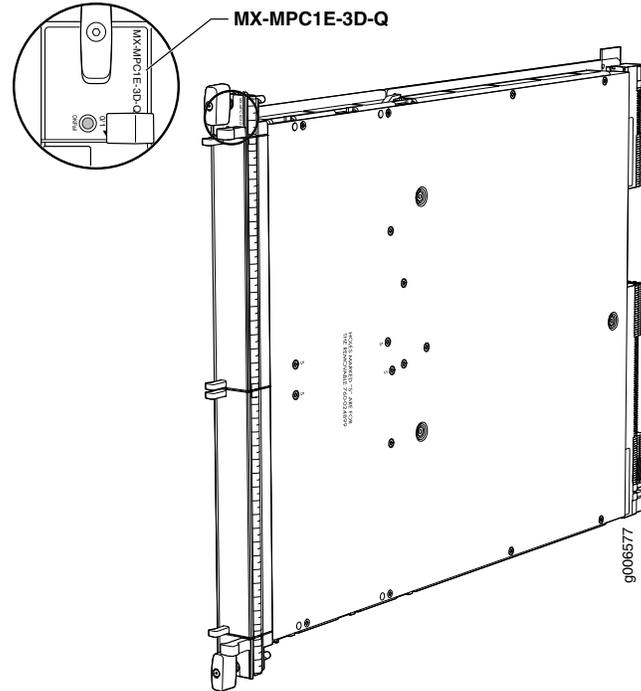

Software release	<ul style="list-style-type: none"> MX240, MX480, and MX960 routers: Junos OS Release 11.2R4 and later MX2010 and MX2020 router: Junos OS Release 12.3 and later <p>For information on which MICs are supported on this MPC, “MIC/MPC Compatibility” on page 26.</p>
Description	<ul style="list-style-type: none"> Power requirement: 3.65 A @ 48 V (175 W) Weight: 13.8 lb (6.3 kg) Model number: MX-MPC1E-3D-Q Name in the CLI: MPCE Type 1 3D Q
Hardware features	<ul style="list-style-type: none"> Two slots for MICs labeled PIC 0/1 and PIC 2/3 One Junos Trio chipset for increased scaling for bandwidth, subscribers, and services LAN-PHY mode at 10.3125 Gbps WAN-PHY mode at 9.953 Gbps
Software features	<ul style="list-style-type: none"> See “Protocols and Applications Supported on the MPC1E for MX Series Routers” on page 328 for information about the protocols and applications that this MPC supports.
LEDs	<p>OK/FAIL LED, one bicolor:</p> <ul style="list-style-type: none"> Steady green—MPC is functioning normally. Blinking green—MPC is transitioning online or offline. Red—MPC has failed.